
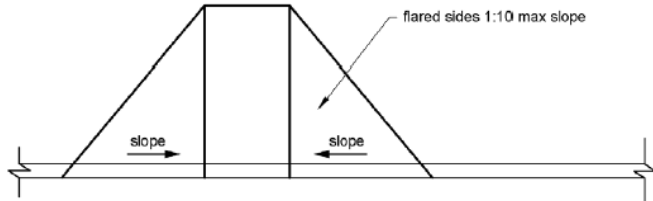
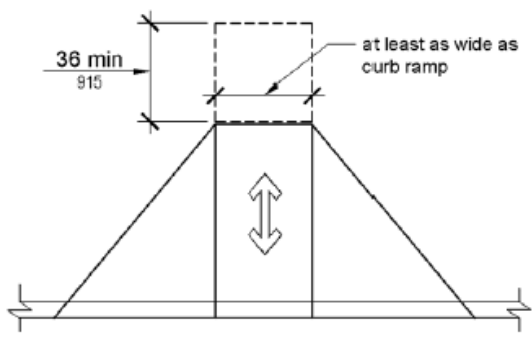



ELEMENT		COMPLIES (or NA)	DOES NOT COMPLY
CURB RAMP			
WHERE REQUIRED	Wherever an accessible route crosses a curb. The slope of the ramp should be the least possible and comply with the requirements below.		
CURB RAMP	Curb ramp width (36" min.)	<input type="checkbox"/>	<input type="checkbox"/>
	Curb ramp slope (1:12 max. running slope; 1:48 max. cross slope)	<input type="checkbox"/>	<input type="checkbox"/>
Curb ramp side flare	Curb ramp flared side-slope (1:10 max. or 1:12 max. if area at top of ramp < 48")	<input type="checkbox"/>	<input type="checkbox"/>
			
	Landings (36" long landing at top)	<input type="checkbox"/>	<input type="checkbox"/>
Curb ramp slope			
	Curb ramp transition (free of abrupt changes > 1/4"; 1:20 max. adjacent surface slopes)	<input type="checkbox"/>	<input type="checkbox"/>
			
	Location (shall not project into traffic lanes; shall not be obstructed by parked vehicle)	<input type="checkbox"/>	<input type="checkbox"/>
	Location at marked crossings (shall be fully contained within marked areas)	<input type="checkbox"/>	<input type="checkbox"/>
	Location at islands (shall be cut through at street level or have ramps with 48" level area between)	<input type="checkbox"/>	<input type="checkbox"/>

ELEMENT	COMPLIES (or NA)	DOES NOT COMPLY
---------	---------------------	--------------------

Curb ramp location

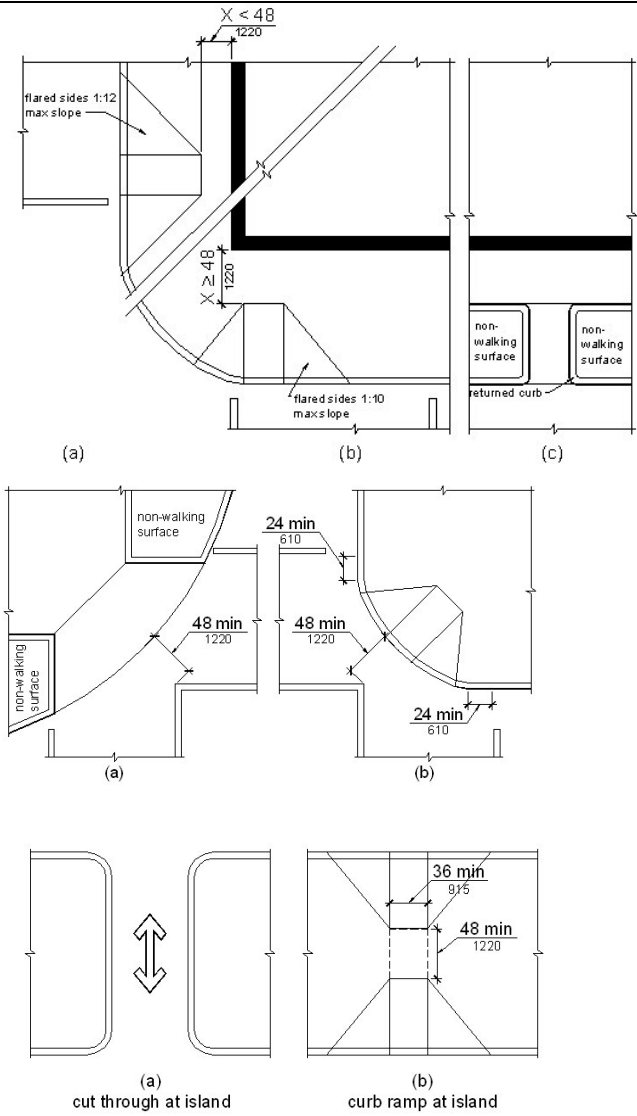

DETECTABLE WARNING SURFACE	Detectable warning (required by ADAAG)	<input type="checkbox"/>		<input type="checkbox"/>
----------------------------	----------------------------------------	--------------------------	--	--------------------------

	Surface (raised truncated domes, .9" nominal diameter, .2" nominal height, 2.35" nominal spacing center to center)	<input type="checkbox"/>		<input type="checkbox"/>
--	--------------------------------------------------------------------------------------------------------------------	--------------------------	--	--------------------------

Note: *Illinois Accessibility Code (IAC)* allows exposed aggregate, parallel or diamond mesh pattern grooves, cushioned surfaces made of rubber or plastic, or raised strips.

	Standardizing (Shall be standard within a site [IAC requirement])	<input type="checkbox"/>		<input type="checkbox"/>
--	-------------------------------------------------------------------	--------------------------	--	--------------------------

	Contrast (color shall contrast with surrounding area)	<input type="checkbox"/>		<input type="checkbox"/>
--	-------------------------------------------------------	--------------------------	--	--------------------------

Detectable Warning Surface

